

POWER SUPPLIES


S200 - DUAL STABILIZED POWER SUPPLY

Dual stabilized power supply with + 15 Vdc 350 mA and - 15 Vdc 75 mA outputs.

115 / 230 Vac mains input. Used industrially for powering instruments that require dual stabilized power supply at ± 15 Vdc.

The input is protected against line over-voltages by means of a varistor. The insulation between the mains and low voltage circuits is 4500 Vac. The outputs are self-protected against short circuits.


The self-extinguishing Noryl case is the width of 4 DIN modules, with heatsink on the upper side, and is designed to fit on 35 mm mounting rail (DIN 46277).



TECHNICAL DATA

- Power supply : 115 / 230 Vac +/- 10% 50 / 60 Hz
- Power consumption : 7,5 VA
- Outputs : + 15 Vdc 350 mA and - 15 Vdc 75 mA
- Operating temp. : - 10 / + 60 °C
- Humidity : 90 % a 40 °C (non-condensing)
- Dimensions (b x h x d) : 70 x 95 x 105 mm
- Weight : approx. 700 g

CONNECTIONS

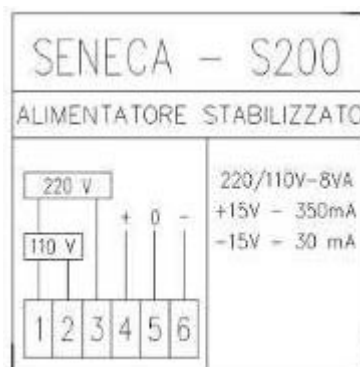

ORDERING CODES

Code	Power supply
S200	115 - 230 Vac

For more info please refer to the operating manual